Air King Ventilation Products®

SPECIFICATIONS

AK864L

EXHAUST FAN WITH LIGHT

100 CFM/3.5 SONES @ 0.10" WG. -HVI CERTIFIED
120 Volts, 1.9 amps, 60 hz.

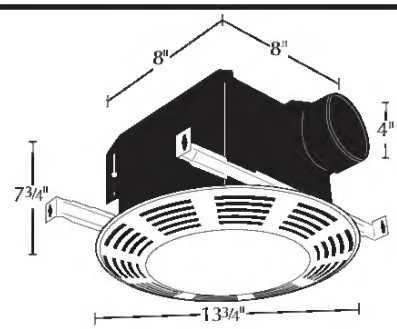

CUL/HVI

Acceptable for use over tub or shower when installed in a GFCI protected branch circuit.

- **Grill**
  White, round polymeric grill secured in place with torsion springs; easily removed if necessary, dimensions - 13 3/4" dia.
- **Light Lens**
  Moonstone glass lens, secured in position using 5 philip's head screws.
- **Light Housing**
  Heavy gauge cold rolled steel c/w powder coat finish; locks in place on the housing using a wing nut.
- **Blower Wheel**
  One piece polymeric wheel, 5 1/8" diameter, 2 3/8" wide, with 48 fins.
- **Motor**
  Heavy duty, permanently split capacitor, plug-in, 4 pole motor, life time lubrication, suitable for continuous operation. Rated 120 volts, 60 hz., 0.80 amps.
- **Fan Housing**
  23 ga. painted steel housing, dimensions 8" x 8" x 7 3/4", double metal thickness mounting tabs.
- **Duct Collar**
  Plastic collar for 4" duct connection, comes complete with built in non-metallic back draft damper for quiet operation.
- **Lamping Information**
  100 watt maximum, type A19, Medium base bulb
- **Unit Mounting**
  Rated Type IC for ceilings insulated to R-40. Designed to mount in ceilings with at least 8" of clearance. The unit has two mounting options 1. directly to the joist using mounting tabs. 2. centered between joists (with 16" centers) using hanging brackets. The housing will mount through drywall thickness up to 3/4", with a rough-in opening of 12 3/4" diameter.
- **Ventilating Area**
  For bathrooms up to 100 sq. ft. for other rooms up to 125 sq. ft.
- **Single Pack Shipping Info**
  Box Dim Box Dim: 15" x 15" x 10"
  Shipping Weight: 11 lbs.

PERFORMANCE

	Static Pressure (inches of w.g.)								*HVI Sones @ .1 SP*	*Fan Speed RPM*	*Powar Watts*
	0	0.05	0.1	0.15	0.2	0.25	0.3	0.35			
Air Flow - CFM	110	105	100	99	95	90	82	78	3.5	2250	170

PROJECT		ARCHITECT		
LOCATION		ENGINEER		
CONTRACTOR		SUBMITTED BY		DATE

FAN NUMBER	MODEL NUMBER	CFM	IN W.G.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS

c UL us

2100 HVI CERTIFIED™

U.S.: 820 Lincoln Drive
West Chester, Pennsylvania 19380-4466
Tel: (610) 692-7400 • 877-304-3785
Fax: (610) 696-8048

Canada: 110 Glidden Road
Brampton, Ontario L6T 2J3
Tel: (905) 456-2033
Fax: (905) 456-1015

Downloaded from www.Manualslib.com manuals search engine